

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 July 2004 (22.07.2004)

PCT

(10) International Publication Number  
**WO 2004/061249 A1**

(51) International Patent Classification: **E04B 5/40**

(21) International Application Number:  
PCT/GB2004/000006

(22) International Filing Date: 5 January 2004 (05.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0300213.6 7 January 2003 (07.01.2003) GB

(71) Applicant (for all designated States except US): **CORUS UK LIMITED** [GB/GB]; 30 Millbank, London SW1P 4WY (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MULLETT, Derek** [GB/GB]; 2 Slatchwood Cottage, Coddington, Nr. Ledbury, Hertfordshire HR8 1JN (GB).

(74) Agents: **FRY, Alan, Valentine et al.**; Fry Health & Spence LLP, The Gables, Massetts Road, Horley, Surrey RH6 7DQ (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **PROFILED STEEL DECKING**

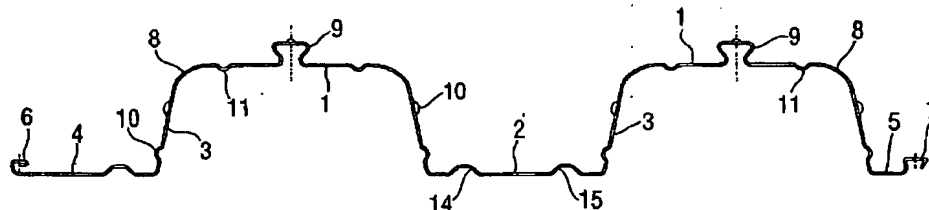

(57) Abstract: Profiled steel decking comprises a steel sheet roll formed to define at least two crests and a trough separated by inclined webs. The boundaries between the webs and the crests are radiussed to define corners each having a smooth curvilinear profile.

WO 2004/061249 A1

1/102  
JC20 Rec'd PCT/PTO 07 JUL 2005  
1

## PROFILED STEEL DECKING

This invention relates to profiled steel decking. More especially, the invention concerns profiled steel decking for use *inter alia* as a component of a composite slab comprising steel decking bonded to a layer of concrete cast in situ over the upper surface of the decking.

Composite structures produced by pouring light or normal weight concrete onto steel decking are used widely in the building industry for flooring and/or ceiling units. Conventionally, steel decking comprises one or more sheets of steel roll formed to create one or more crests and troughs separated by inclined webs. Shear stud connectors are traditionally used to provide enhanced bonding between the steel decking and the concrete layer. These shear stud connectors are placed in the trough positions of the decking and are enveloped by the concrete layer when it is cast.

Traditionally, the crests and troughs of profiled steel decking are generally flat with the corners between the crests and the uppermost ends of the inclined webs defined by acute angles. Also, the surfaces of the inclined webs of traditional steel decking are generally planar. The bending capacity of such profiles is limited.

Examples of traditional steel decking are to be found in US Patents 4144369, 4453364, 4593506, 4675238, 4726159, 4962622 and 3812636. In each of these documents, the corners between the crests of the decking and the uppermost ends of the webs are defined by acute angles.

The present invention sets out to provide improved profiled steel decking which exhibits clear advantages over traditional steel decking.

CONFIRMATION COPY

According to the present invention in one aspect, there is provided profiled steel decking which comprises a steel sheet roll formed to define at least two crests and a trough separated by inclined webs, decking being characterised in that the boundaries between the webs and the crests are radiussed to define corners each having a smooth curvilinear profile, the radius of each such corner being between 15 and 30mm.

Typically, the curvilinear corners have a radius of between 20 and 25mm.

Each inclined web of the steel decking may include two or more vertically spaced linear rows of embossments which extend outwardly from the outer surface of each inclined web. Each embossment may be generally circular in section and may be produced by roll forming. Each embossment of the uppermost row may be positioned above a land portion separating neighbouring embossments of the lowermost row. The diameter of each embossment preferably lies within the range 9.0 to 15.0mm. A typical diameter is 12.0mm. The spacing between the centres of neighbouring embossments preferably lies within the range 30 to 40mm. A typical spacing is 35mm. The vertical distance between the upper and lower rows may be between 27 and 37mm. A typical distance being 32mm.

The trough between the two crests of the decking may be formed with two stiffening ribs each of which is spaced generally equidistant from the lowermost end of the respective inclined web. The flange portion defined between the stiffening ribs may provide a site for shear stud connectors.

The width of each stiffening rib of the trough may be between 15 and 25mm. Typically, the width of one rib is 21mm and that of the other rib 20mm.

Each crest may be formed with a generally 'V' shaped projection which, in use, defines a shear connector between the decking and a concrete layer cast over the upper surface of the decking.

The angle subtended by each inclined web to the horizontal preferably lies within the range of 75 to 85°. A typical angle is 78.5°.

The decking is preferably roll formed from galvanised steel sheet whose gauge is between 0.8 and 1.3mm. Typically gauges are 0.9 to 1.2mm. The decking is preferably manufactured using a high grade steel having, typically, a yield value of 500 N/mm<sup>2</sup>.

The invention will now be described by way of example only, with reference to the accompanying diagrammatic drawings, in which:-

Figure 1 is an end view of profiled steel decking in accordance with the invention;

Figure 2 is a scrap side view to an enlarged of a section of the decking illustrated in Figure 1;

Figure 3 is a scrap plan view from above of a section of the steel decking shown in Figure 1; and

Figure 4 is a side view of a connection between neighbouring steel deckings in accordance with the invention.

The steel decking illustrated in the drawings is roll formed from a single sheet of galvanised steel and comprises two crests 1 separated by a trough 2. Each crest is bordered with two outwardly inclined webs 3. The lower ends of the webs are bordered by outwardly extending end laps 4, 5. Each of these end laps 4, 5 is formed with interlocks 6, 7 respectively

which cooperate with complementary interlocks of neighbouring steel decks to increase the effective span of the overall steel decking.

The gauge of the steel sheet from which the decking is roll formed is typically between 0.9 and 1.5mm. A preferred gauge is 1.2mm. The steel sheet may be coated with a bonded plastics film for protective and aesthetic purposes. Alternatively, the sheet may be formed with a polyester coating.

As will be seen from the drawings, the corners between the crests 1 and the adjoining webs 3 are radiussed to produce a curvilinear profile 8. These curvilinear profiles increase the bending capacity of the decking and add strength particularly in the corner regions to inhibit failures which occur with traditional decking. The added strength enables the span lengths of the decking to be increased.

The actual radius of any given profiled corner 8 will depend *inter alia* on the required dimensions of the decking. Typically, the selected radius will be between 20 and 30mm. Preferred radii are 23.8 and 25mm. The span of each radiussed corner is typically between 30 and 35mm. A preferred span is 32.3mm.

As will be seen from Figures 1 and 2, each web 3 is formed with two vertically spaced linear rows of embossments 6 which project outwardly from the web surfaces. These embossments are produced during the roll forming process and the boundary between each embossment and the adjoining web surface is circular. Typically, the diameter of each embossment is in the range 9.0 to 15.00mm. A preferred diameter is around 12.0mm.

As will be seen from Figure 2, the embossments of the upper row are displaced linearly with respect to those of the lower row such that each upper embossment is positioned above a land portion of the web

sited approximately midway between neighbouring embossments of the lower linear row.

The rows of embossments extend along the entire length of each web and their presence enhances the bond between the decking and the concrete layer which, in use, is poured over the upper surface of the decking. Typically, the vertical spacing between the rows is in the range 30 to 35mm (measured between embossment centres); a preferred distance is 32mm. Typically, the centres of the embossments of the lower row are positioned between 13 and 18mm from the respective side laps 4, 5, a preferred distance being 15.9mm. The centres of the embossments of the upper row are typically positioned between 10 and 15mm below the lowermost point of the respective radiussed corner, a preferred distance being 12.2mm.

The spacings between the centres of neighbouring embossments of both the upper and lower rows is typically between 32 and 37mm, a preferred spacing being 35mm.

The shape and dimensions of the embossments may vary from those illustrated and discussed. Thus, the embossments could be ovoid or generally rectangular.

Each crest 1 includes a linear row of hollow projections 9 each of whose interior is generally dovetailed in section. These projections are produced during the roll forming process and define shear connectors between the steel decking and the concrete layer which is poured over the upper surface of the decking in use. The dovetail shaping of each projection allows hangers to be supported therein. The diameter of the lower neck of each projection is typically 12mm and the overall height of each projection is typically 15mm. As will be seen from the drawings, the joins between the crest and the projection are curvilinear. The crests are also formed with two inwardly projecting longitudinal ribs 11 for stiffening

purposes. The width of these ribs are typically between 9 and 10mm. A preferred width is 9.5mm.

The trough 2 is formed with two longitudinal upwardly projecting ribs 14, 15 separated by a solid land section through which shear stud connectors can be positioned. The presence of the ribs assists accurate location of shear stud connectors in use of the decking. The width of each rib 14, 15 is typically 21mm and the spacing between the ribs is typically 50mm.

Each end lap 4, 5 carries an interlock. These extend along the entire length of each end lap and are shaped in a complementary fashion to enable two or more steel decks to be joined together to produce a decking of any required width.

It will be appreciated that the foregoing is merely exemplary of steel decking in accordance with the invention and that various modifications can readily be made thereto without departing from the true scope of the invention as set out in the appended claims.

**CLAIMS**

1.     Profiled steel decking which comprises a steel sheet roll formed to define at least two crests (1) and a trough (2) separated by inclined webs (3), the decking being characterised in that the boundaries between the webs (3) and the crests (1) are radiussed to define corners each having a smooth curvilinear profile (8), the radius of each such corner being between 15 and 30mm.
2.     Steel decking as claimed in claim 1 wherein the curvilinear corners have a radius of between 20 and 25mm.
3.     Steel decking as claimed in any one of the preceding claims wherein each inclined web of the steel decking includes two or more vertically spaced linear rows of embossments which extend outwardly from the outer surface of each inclined web.
4.     Steel decking as claimed in claim 4 wherein each embossment is generally circular in section and is produced by roll forming.
5.     Steel decking as claimed in claim 3 or claim 4 wherein each embossment of the uppermost row is positioned above a land portion separating neighbouring embossments of the lowermost row.
6.     Steel decking as claimed in any one of claims 3 to 5 wherein the diameter of each embossment lies within the range 9.0 to 15.0mm.
7.     Steel decking as claimed in any one of claims 3 to 6 wherein the spacing between the centres of neighbouring embossments lies within the range 30 to 40mm.



8. Steel decking as claimed in any one of claims 3 to 7 wherein the vertical distance between the upper and lower rows of embossments is between 27 and 37mm.
9. Steel decking as claimed in any one of the preceding claims wherein the trough between the two crests of the decking is formed with two stiffening ribs each of which is spaced generally equidistant from the lowermost end of the respective inclined web.
10. Steel decking as claimed in claim 9 wherein the flange portion, defined between the stiffening ribs provides a site for shear stud connectors.
11. Steel decking as claimed in claim 9 or claim 10 wherein the width of each stiffening rib of the trough is between 15 and 25mm.
12. Steel decking as claimed in any one of the preceding claims wherein each crest is formed with a generally 'V' shaped projection which, in use, defines a shear connector between the decking and a concrete layer cast over the upper surface of the decking.
13. Steel decking as claimed in any one of the preceding claims wherein the angle subtended by each inclined web to the horizontal lies within the range of 75 to 85°.
14. Steel decking as claimed in any one of the preceding claims roll formed from galvanised steel sheet whose gauge is between 0.8 and 1.3mm.

1/1

FIG. 1

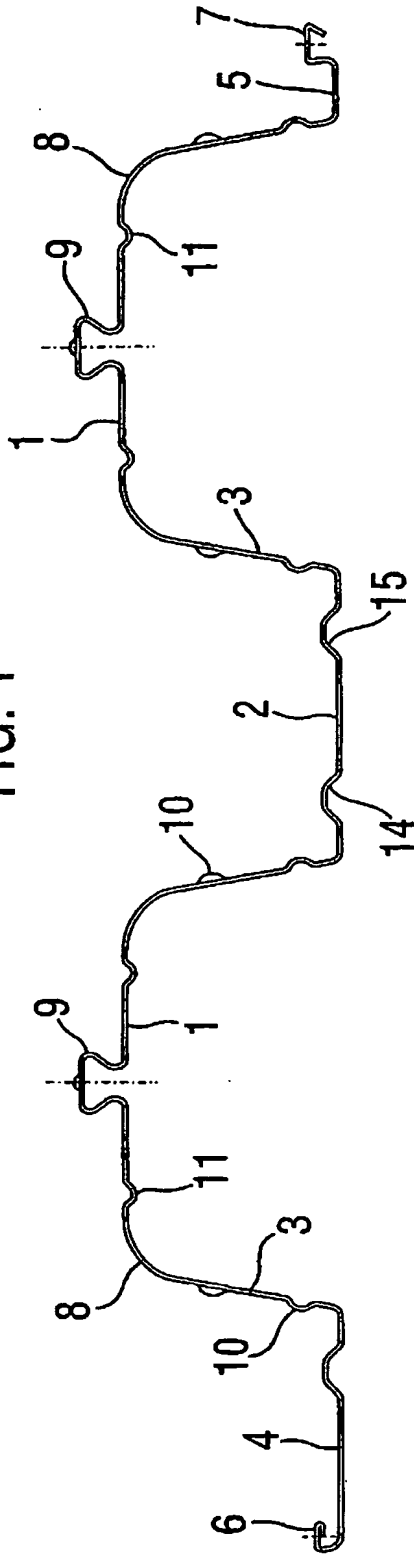


FIG. 2

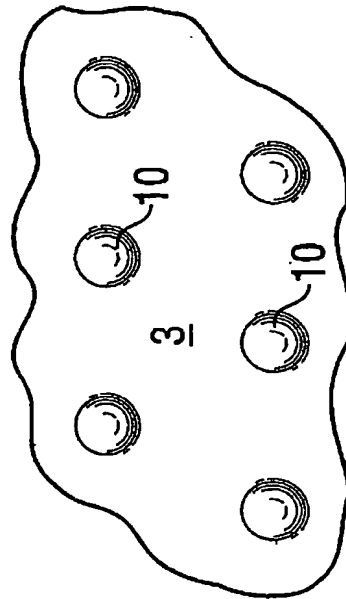


FIG. 3


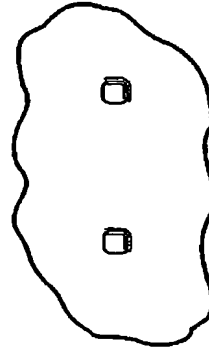


FIG. 4

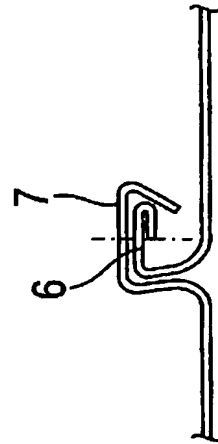

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB2004/000006

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 E04B5/40

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages  | Relevant to claim No. |
|------------|---|-----------------------|
| X          | GB 1 361 448 A (PRINS NV;HOLLANDSE BOUWCOMBINATIE HOLLA)<br>24 July 1974 (1974-07-24)   | 1-8,13,<br>14         |
| Y          | page 2, line 107; figures<br>page 2, line 129 -page 3, line 8   | 9-12                  |
| Y          | EP 0 129 416 A (ROBERTSON UK LTD H H)<br>27 December 1984 (1984-12-27)<br>figures 1,3-5   | 9-11                  |
| Y          | GB 2 195 680 A (QUIKSPAN CONSTRUCTION LIMITED;UNIV SOUTHAMPTON)<br>13 April 1988 (1988-04-13)<br>page 2, paragraph 1; figures 4,5 | 12                    |
| X          | US 5 809 721 A (ANTROPIUS JEAN DANIEL)<br>22 September 1998 (1998-09-22)<br>figures 1A,1B,5,7                                     | 1,2                   |
|            | -/-   |                       |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

29 April 2004

Date of mailing of the international search report

10/05/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Demeester, J

## INTERNATIONAL SEARCH REPORT

information on patent family members

Int'l

nal Application No

PCT/GB2004/000006

| Patent document<br>cited in search report |   | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---|---------------------|----------------------------|---------------------|
| GB 1361448                                | A | 24-07-1974          | NL 7013151 A               | 07-03-1972          |
|   |   |                     | BE 772153 A2               | 03-03-1972          |
|   |   |                     | DE 2144308 A1              | 16-03-1972          |
|   |   |                     | FR 2105267 A1              | 28-04-1972          |
|   |   |                     | LU 63843 A1                | 11-01-1972          |
| EP 0129416                                | A | 27-12-1984          | AU 572852 B2               | 19-05-1988          |
|   |   |                     | AU 2948384 A               | 20-12-1984          |
|   |   |                     | EP 0129416 A2              | 27-12-1984          |
|   |   |                     | GB 2141464 A ,B            | 19-12-1984          |
|   |   |                     | ZA 8404535 A               | 24-04-1985          |
| GB 2195680                                | A | 13-04-1988          | NONE                       |                     |
| US 5809721                                | A | 22-09-1998          | FR 2704885 A1              | 10-11-1994          |
|   |   |                     | DE 69415933 D1             | 25-02-1999          |
|   |   |                     | DE 69415933 T2             | 10-06-1999          |
|   |   |                     | EP 0654109 A1              | 24-05-1995          |
|   |   |                     | ES 2127394 T3              | 16-04-1999          |
|   |   |                     | WO 9425699 A1              | 10-11-1994          |
| US 5056348                                | A | 15-10-1991          | US 4962622 A               | 16-10-1990          |
|   |   |                     | JP 3021750 A               | 30-01-1991          |

## INTERNATIONAL SEARCH REPORT

Int'l Application No  
PCT/GB2004/000006

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages              | Relevant to claim No. |
|------------|---|-----------------------|
| X          | US 5 056 348 A (GRAY CHARLES R ET AL)<br>15 October 1991 (1991-10-15)<br>figures 15,16<br>----- | 1,2                   |